AUSSIE
GREEN LIGHTING

Unit 10/78 Willandra Drive Epping Vic 3076 | 03 9401 4885|
E-mail:info@aussiegreenlighting.com.au |
Web:www.aussiegreenlighting.com.au

LED Linear Highbay | 150W

APPLICATIONS

Tunnel



Billboards



Warehouses

Architectural lighting etc

AUSSIE
GREEN LIGHTING

SPECIFICATIONS

Dimension	900mm
Input Voltage	AC220~240V,50Hz
Power	150W
LED Type	Philips 3030
Lumen (± 10%)	19500lm
Color Temperature (CCT)	2700K–6500K
Beam Angle	30°, 60°, 90°, 30X70°, 70X140°, 60X120°
Color Rendering Index (CRI)	Ra > 80
LED Luminous Efficiency	130lm/w
Dimming (Option)	PWM,1–10V,DALI
Power Factor (PF)	> 0.95
IP Rating	IP 65
IK Rank	IK 08
Material	PC+AL
Mounting	Hook, Z shaped bracket, Graduated bracket, U shaped bracket, Wall mounted

AUSSIE GREEN LIGHTING

MOUNTING

① Hook

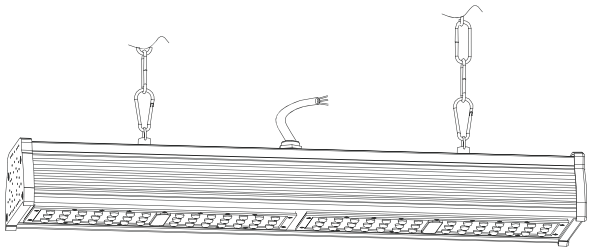

② Graduated bracket

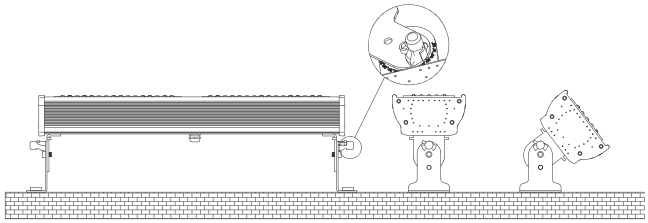

③ Z shaped bracket

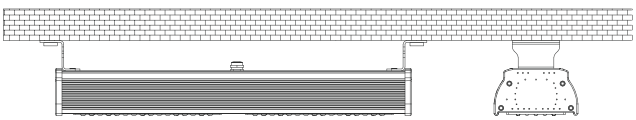

④ U shaped bracket



AUSSIE
GREEN LIGHTING

⑤ Wall mounted