




AUSSIE
GREEN LIGHTING

Unit 10/78 Willandra Drive Epping Vic 3076 | 03 9401 4885|


E-mail: info@aussiegreenlighting.com.au |

Web: www.aussiegreenlighting.com.au

LED Solar Street Light-B



AUSSIE
GREEN LIGHTING

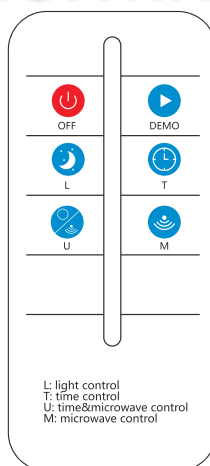

- No matter day or night, light "OFF"
- No matter day or night, light "NO" for 1 minute
- At night, 12hrs full power
- At night, 4 hrs full power+8hrs 25%
- At night, 4 hrs full power+8hrs motion sensor control
- At night, 12 hrs motion sensor control

Features


1. High class integrated die-casting aluminum alloy case
2. Lighting mode with motion sensor
3. 120° view angle
4. Over 3 nights lighting after full charge
5. Easy to install, auto on/off
6. With remote control, UVA technology, bring high corrosion resistance, 30m control operation, increase/decrease the brightness

APPLICATION

Highway / Patio Lighting / Building Parking / Bike Path / Courtyard / Garden / Park /
Street / Roadway / Pathway / Parking Lot / Private Road / Sidewalk / Public Square / Plaza .




DIMENSION (Unit:mm)

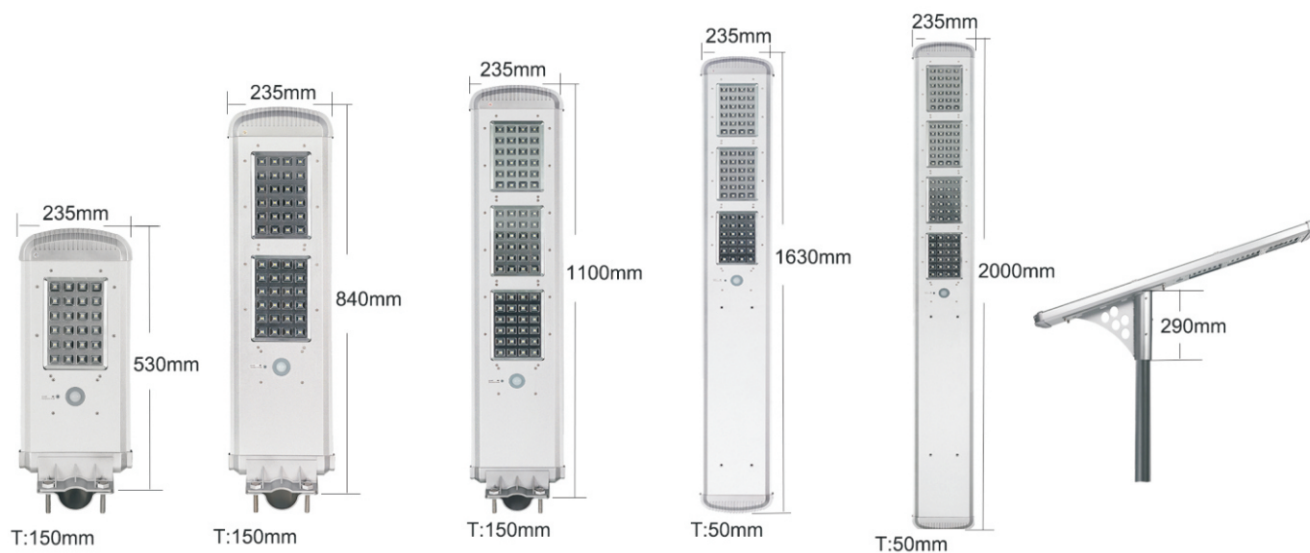

SPECIFICATIONS

Model	ERS-SSB-10W	ERS-SSB-20W	ERS-SSB-30W	ERS-SSB-50W	ERS-SSB-80W
Lumen	1000lm	2000lm	3000lm	5000lm	8000lm
Solar Panel	18V 12W	18V 25W	18V 35W	18V 60W	18V 80W
Mounting Height	2.5~3m	3~4m	4~5m	4~6m	6~8m
Battery	72WH 12V	144WH 12V	252WH 12V	360WH 12V	480WH 12V
Dimension(mm)	530*235*150	840*235*150	1100*235*150	1630*435*234	2000*435*234
Battery Type	Li-ion				
Cloudy/Rainy Days	3Cloudy / Rainy days				
Solar Charging Time	6~10 hours by bright sunlight				
Motion Sensor	Yes (Microwave Sensor)				
Certificates	CE、ROSH				
IP Rating	IP 65				
Working Temperature	-25℃ to 65℃				
Install Pole Diameter	Φ 60- Φ 65mm				
Lighting Mode	Dusk to down + Time control + motion sensor (Bright lighting 30secs when people move through the light)				
Material	High Class Aluminum (Anodic oxidation process)				

PHOTOMETRIC DIAGRAMS:

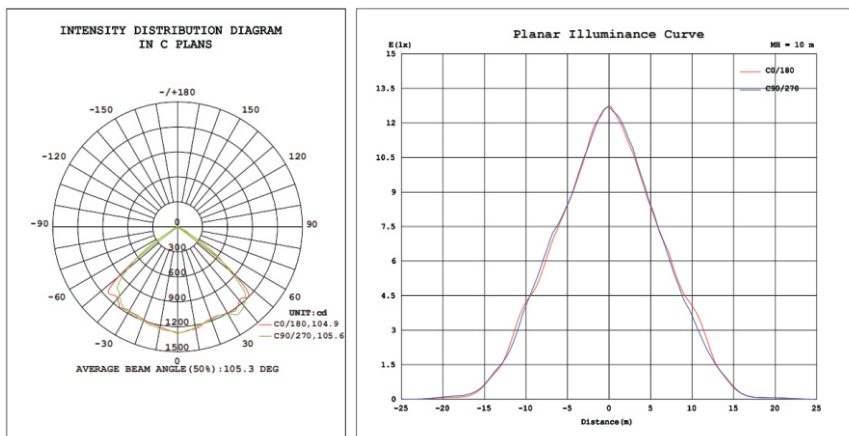

PACKING INFORMATION



Model No.	PCS /CTN	OUTER CARTON SIZE (M)			CTN CBM	N.W/CTN	G.W/CTN
		L	W	H			
ERS-SSB-10W	1	0.62	0.20	0.30	0.04	4.2	5.0
ERS-SSB-20W	1	1.92	0.20	0.30	0.06	6.5	7.5
ERS-SSB-30W	1	1.18	0.20	0.30	0.07	8.5	9.7
ERS-SSB-50W	1	1.68	0.14	0.30	0.07	11.0	12.0
ERS-SSB-80W	1	2.05	0.14	0.30	0.09	13.0	14.6



INSTALLTION DIAGRAM

